

## Oil level indicators

push-fit, technopolymer

### MATERIAL

Polyamide based (PA) technopolymer, black colour, matte finish.

### WINDOW

Transparent polyamide based (PA-T/AR) technopolymer.

### CONTRAST SCREEN

White lacquered aluminium with red level line.

### PACKING RING

NBR synthetic rubber O-Ring.

### MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

### FEATURES AND APPLICATIONS

The push-fit assembly is guaranteed by optimized ribbings.

Sealing is guaranteed by the O-ring.

HRT. oil level indicators push-fit are particularly suitable for assembly on reservoirs with limited pressure.

### NOTE


For use with other fluids with special additives, please contact ELESA Sales Department.

### ASSEMBLY INSTRUCTIONS

Chamfer hole 1x45° and grease slightly the outside surface of the O-ring to make assembly easier.



ELESA Original design

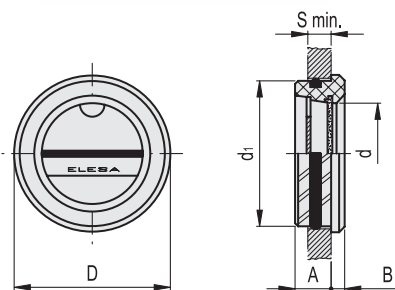

Code	Description	d1	A	B	D	d	Smin	Mounting hole d1 H11	⚖️
10751	HRT.15-26	26	9	4.5	28	14.5	6	26	6
10756	HRT.20-32	32	10.5	4.5	36	18	8	32	10
10761	HRT.25-38	38	11	5	42	23	8	38	12
10766	HRT.40-60	60	11	5.5	64	40	9	60	29

## Oil level indicators

push-fit with temperature reading, technopolymer

### MATERIAL

Polyamide based (PA) technopolymer, black colour, matte finish.

### WINDOW

Transparent polyamide based (PA-T/AR) technopolymer.

### CONTRAST SCREEN WITH BIMETALLIC THERMOMETER

Graduated scale up to 100°C to read oil temperature, even when oil level is at minimum, thanks to the conductivity of the aluminium contrast screen.

### PACKING RING

NBR synthetic rubber O-Ring.

### MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

### FEATURES AND APPLICATIONS

The push-fit assembly is guaranteed by optimized ribbings.

Sealing is guaranteed by the O-ring.

HRT-T oil level indicators push-fit are particularly suitable for assembly on reservoirs with limited pressure.

### NOTE


For use with other fluids with special additives, please contact ELESA Sales Department.

### ASSEMBLY INSTRUCTIONS

Chamfer hole 1x45° and grease slightly the outside surface of the O-ring to make assembly easier.



ELESA Original design

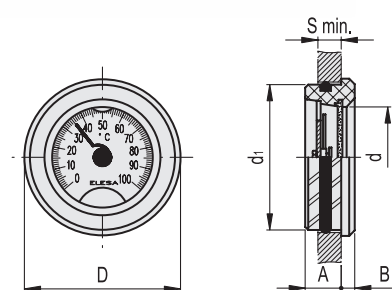

Code	Description	d1	A	B	D	d	Smin	Mounting hole d1 H11	⚖️
10781	HRT.25/T-38	38	11	5	42	23	8	38	12
10786	HRT.40/T-60	60	11	5.5	64	40	9	60	29