

Stainless Steel-Hinges

consisting of three parts

SPECIFICATION

Type

Type **D**: consisting of three parts

Hinge body, pin, washer

- Stainless Steel AISI 303 **NI**
- Stainless Steel AISI 316L **A4**

Hexagon nut ISO 4032
Stainless Steel AISI 304

Serrated washer DIN 6797 for securing screws
Stainless Steel AISI 304




INFORMATION

Stainless Steel-Hinges GN 129.5 are used for doors which are flush with the frame on the outside. Once assembled, they cannot be unhinged.

With the fixing from the inside, they are especially suitable for doors and trap doors which must not be detachable from the outside as an anti-tamper device.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- List of hinges types (see page 1362)

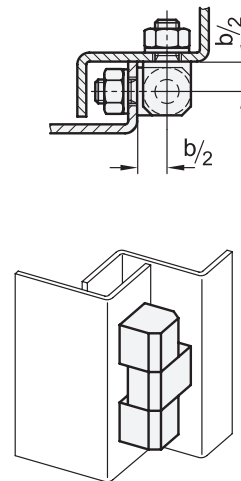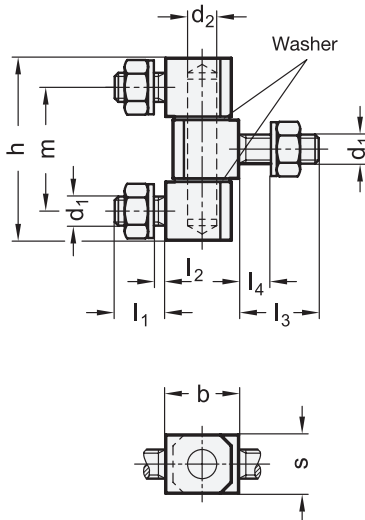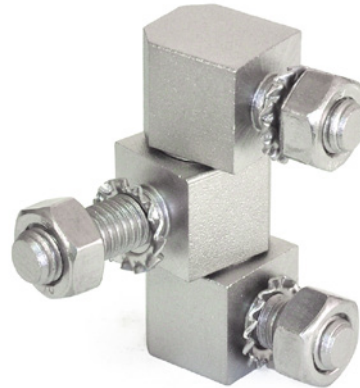

GN 129.5-NI

STAINLESS STEEL

Description	s	b	d1	d2	h	l1	l2	l3	l4 max.	m	⚖
GN 129.5-12-D-NI	12	15	M 6	6	39.2	10	5	14	9	27.2	57
GN 129.5-16-D-NI	16	20	M 8	8	49	14	8	22	16	33	134

GN 129.5-A4

STAINLESS STEEL

Description	s	b	d1	d2	h	l1	l2	l3	l4 max.	m	⚖
GN 129.5-12-D-A4	12	15	M 6	6	39.2	10	5	14	9	27.2	61
GN 129.5-16-D-A4	16	20	M 8	8	49	14	8	22	16	33	140

